



**SOUTH AFRICAN WINE AND SPIRIT BOARD**  
**Scheme for Integrated Production of Wine**

**Integrated Production of Wine:**  
**Guidelines for Wineries and Bottling Facilities**

**9<sup>th</sup> Edition: MAY 2015**

Compiled by *ARC Infruitec-Nietvoorbij* and *Enviroscientific*  
In consultation with the **Viticulture and Wine Industry**

The inherent quality of grapes determined by the genetic characteristics of the cultivars and the application of the IPW guidelines for the farm can be negated by the wrong harvesting, winemaking and bottling procedures. Successful winemaking and handling requires large capital inputs and high quality manpower. Incorrect application of equipment and chemicals, wasteful use of water and electricity and the dumping of waste products in nature have a negative effect on the environment and on the image of wine. These processes must therefore carry the principles of IPW through to the final product.

The winery and its immediate environment should reflect an image of environmentally friendly and food safe production. Wine production will be evaluated according to the following guidelines to determine if wines qualify as IPW-wines. Evaluation starts with harvesting of grapes. For a wine to qualify for the IPW seal, only grapes and/or bulk wine that qualify for IPW may be used. In addition, the wine should be made and bottled at an IPW certified winery and/or bottling facility and all prescribed records must be kept.

These guidelines are applicable to wineries and bottling facilities. Where “winery” is stated in the text, it also applies to a bottling facility.

## 1 IPW TRAINING

To implement IPW successfully and effectively requires thorough knowledge of the principles involved.

- It is therefore compulsory that at least one representative of a winery that wants to participate in the IPW scheme regularly attends an IPW training course. This person must be in direct control of production or winemaking.
- All course attendants will receive a certificate (valid for three years) to certify that they have attended an accredited IPW course. A refreshment course should be attended every three years thereafter to ensure effective management of IPW in the winery.
- Additional to the certificate, a thorough knowledge of the IPW principles should be demonstrated by the person responsible for IPW in the winery.

## 2 ZONING, REGISTRATION AND ANALYSIS OF INCOMING WATER

The winery should have a map (or Google image) of the property on file indicating at least the following:

- Winery buildings
- Incoming water lines to the facility
- Dams/boreholes/fountains/rivers/wetlands/storm water furrows on the property
- Wastewater lines and treatment system
- Wastewater containment dam(s) (if applicable)
- Area where wastewater is irrigated (if applicable) or disposed of (e.g. Municipal line)
- Relevant sewage systems (e.g. septic tank and soak-aways, conservancy tanks, entry into Municipal line)

The winery should also have the following documentation available:

- If applicable, evidence (Record of Decision (RoD) from the Department of Environmental Affairs) should be available to confirm that enlargement of the winery/bottling facility took place according to legislation.
- A Zoning Certificate to confirm that the land where the winery is situated, is zoned as Agri-Industrial / Industrial land. Where wineries are situated on farms, the applicable land should be rezoned from Agricultural land (Agriculture I) to Agri-Industrial land (Agriculture II). Wineries situated in Industrial areas of towns should

also provide a Zoning Certificate as confirmation of the property's zoning. Zoning certificates are issued by the local Municipality.

- A Certificate of Acceptability for Food Premises (Regulation 962) should be available as indicated in the Government Notice No. R. 962 of 23 November 2012. A Certificate of Acceptability for Food Premises is issued by the local Municipality. Where a R.918 certificate was issued previously, this remains valid until such time as the person in which name it was issued, i.e. the site manager is no longer managing the site, in which case a new certificate needs to be applied for under Regulation R.962.
- Evidence must be provided to confirm that the water used in the winery, is registered at the relevant authority for the applicable use (Agri-Industrial). Boreholes, river abstractions, spring abstractions, etc. must be registered at the Department of Water Affairs (DWA). Should Municipal water be used, evidence should be available in the form of Municipal invoices.
- A recent complete chemical and microbial analysis of the water used in the winery should be available. Analyses must be conducted at least once every twelve months by an accredited laboratory to determine whether the water quality conforms to the SABS 241-1:2011 drinking water standards. Refer to **Tables 8 and 9 of the document on the following website:**  
[https://www.dwa.gov.za/dir\\_ws/DWQR/Subscr/ViewNewsDoc.asp?FileID=263](https://www.dwa.gov.za/dir_ws/DWQR/Subscr/ViewNewsDoc.asp?FileID=263) ).

Furthermore the winery should be able to indicate/demonstrate the method of sewage disposal, e.g. septic tank fitted with a soak-away, conservancy tank emptied by contractor/Municipality or direct disposal into a Municipal sewer. Should removal/disposal take place by an external company, records should be available as confirmation of the removal and safe and legal disposal of sewage. For direct disposal into the Municipal sewer, Municipal invoices should be provided as confirmation.

### **3 QUALITY & TEMPERATURE OF INCOMING GRAPES (not applicable to bottling facilities)**

Records should be kept of the percentage rot and grape temperature of each grape load received by the winery.

Rotten or diseased grapes may not be used to make IPW wines, except in the case of *Botrytis* infection for production of Special Late Harvest and/or Noble Late Harvest wines. A higher percentage of rotten grapes received will result in an increased sulphur usage and energy consumption to ensure that quality wines would still be produced. Less than 5% rotten grapes are considered good, but more than 20% rotten grapes are rated poor.

During hand and mechanical harvesting maximum care should be taken not to damage grapes and compromise quality. To preserve quality, grapes should be harvested at the lowest possible temperature and standing time should be reduced to a minimum. In case of mechanical harvesting the machine should be set to limit damage to grapes and to minimize the loss of juice and inclusion of material other than grapes (MOG). Grapes to be transported over long distances should be blanketed under an inert gas such as nitrogen to limit oxidation. During transportation to the winery, grapes must not come into contact with substances not registered for use on grapes in an IPW programme (e.g. pesticides) or any other substances that may contaminate grapes (e.g. fertiliser, oils, lubricants). Decks of trailers or trucks should be of food grade material or coated in an acceptable manner. Should all grape loads for winemaking purposes arrive at the winery at degrees under 25°C, it is evaluated as good. Should grape load temperature exceed 30°C, it is evaluated as **poor**. If grapes are cooled at the winery before it is processed, the temperate applicable to this guideline should be taken before grapes are cooled.

#### **4 ENERGY USE AND CARBON EMISSIONS**

Climate change is probably the most important environmental aspect currently under investigation in the world. Global warming and its long-term effect on the agricultural industry will impact each and everyone. It fundamentally results from the emission of green house gases including carbon dioxide (CO<sub>2</sub>) and methane into the atmosphere. For reporting purposes all green house gas emissions are expressed in CO<sub>2</sub> equivalent emissions.

Wineries contribute to greenhouse gas emissions/CO<sub>2</sub> equivalents during various activities in the winery of which the largest contribution is made by the combustion of fossil fuels which is directly used for transport and indirectly by using Eskom for electricity generation. To ensure that wineries continuously decrease CO<sub>2</sub> equivalent emissions, various records should be kept to benchmark each winery before setting objectives for continual improvement in future.

##### **4.1 Carbon Emissions**

The winery (including the farm where applicable and if it is preferred) must keep records of monthly energy usage applicable to winery operations (including transport of grapes to the winery). These records should be summarised in table form to indicate the amount of each energy source used per month for each calendar year or financial year. Summaries should be available for at least two consecutive years for comparison purposes. To measure continual improvement of energy usage, the following records are regarded as the most important:

- Electricity usage (kWh)
- Diesel usage (Liters)
- Petrol usage (Liters)
- Liquid Petroleum Gas (LPG) usage (kg)
- Any other fuels (e.g. coal, furnace oil, etc.) (kg or Liters)

This guideline is currently evaluated based on availability of records and not based on amount of energy used. Above-mentioned records must also be available at smaller wineries.

From the international market, there is increasing pressure to also include the impact on the environment resulting from the production of wine. The main aspect that is focused on is the impact of winemaking on global warming and the international market will also consider this impact when wine is sourced.

##### **4.2 Bonus points: Calculation of carbon footprint**

The calculation of the carbon dioxide equivalent emissions of the winery (including the farm where applicable and if it is preferred) is not a legal requirement at present and is consequently not compulsory for IPW at the moment. Wineries or bottlers are encouraged to calculate their carbon emissions by using the internationally accepted protocol and calculator that is available from the website [www.climatefruitandwine.co.za](http://www.climatefruitandwine.co.za). If this calculation has been done, bonus points can be awarded. To make this calculation possible, record-keeping is essential. The carbon footprint should preferably be calculated for at least two consecutive years for comparison purposes. It can then be established whether the entity's energy consumption has decreased or at least remained constant. Either calendar year or financial years can be used. If an increase in energy consumption was observed, it should be motivated. Every farm and/or winery is only compared with itself. Industry norms are not yet available. The best measurement to determine whether the carbon footprint has improved or not, is to look at the intensity of the emissions by determining the emissions per liter wine produced per annum. By using this method, an increase in production and the associated increase in energy consumption can be taken into account.

The Confronting Climate Change project ([www.climatefruitandwine.co.za](http://www.climatefruitandwine.co.za)) is co-funded by the wine industry via Winetech and was developed specifically to develop an agreed methodology to measure a winery's carbon footprint and to develop RSA wine industry benchmark. The Confronting Climate Change carbon footprinting tool has been independently audited by the Carbon Trust who have recognized the tool as being a reliable and credible resource for companies that make up the supply chains of the South African fruit and wine industry to measure the carbon footprints of their products. The wine industry role players are therefore encouraged to make use of the tool.

## 5 IMPLEMENTING AND MAINTAINING INFRASTRUCTURE AND EQUIPMENT

- Equipment must be covered with inert materials or be made of stainless steel or other inert material to prevent contamination of wine and to facilitate easy cleaning (e.g. free from cracks).
- Only food grade lubricants may be used.
- Floors should be free from cracks, allow free draining and should be cleaned regularly.
- Packaging and storage areas should be maintained to avoid rodent or pest access and a pest control program should be in place. Pest control baits must be clearly marked. Records should be kept of pest activity and bait placements.
- Toilet facilities with wash basins, soap and hot water (55°C) should be available for use by all staff. These facilities should be well ventilated.
- The winery and storage areas must be well ventilated to avoid undesirable conditions (e.g. humidity, heat build-up, etc.)
- Efficient lighting should be available to ensure safe operation of all equipment and to assist with cleaning.
- Thermometers used in tanks may not contain any mercury. Alcohol or digital types are preferred.
- All pipes, transfer lines and hoses must be stored to allow self draining. They must be flushed with potable water prior to use.
- An equipment and infrastructure maintenance schedule must be in place to ensure the integrity of all equipment and calibrations to avoid any food safety hazards. Small wineries can use invoices as proof of repairs and services.

## 6 SO<sub>2</sub> LEVELS

SO<sub>2</sub> additions to wines are required to ensure that wines are preserved. The total SO<sub>2</sub> levels of packed wines are evaluated according to Appendix 5A. Since SO<sub>2</sub> additions can still be made after bulk wines are delivered and/or blended, the winery and/or bottling facility that take ownership of the final bottled product, will be held responsible for the total SO<sub>2</sub>-level of the wine (and not the initial producer of the bulk wine).

## 7 HANDLING OF FOOD GRADE CHEMICALS

### 7.1 Substances added to wine

Natural precipitants, filter materials, fining agents and other wine additives should be used that are free from Genetically Modified Organisms (GMO) and environmentally friendly. Certificates to prove that all relevant substances added to the wine are GMO-free, should be available on file. Only compounds listed in "*Liquor Products Act 60 of 1989*" may be used (refer to Table 6 of the regulations, obtained from the website [http://www.sawis.co.za/winelaw/download/Regulations,\\_annotated\\_05\\_2014.pdf](http://www.sawis.co.za/winelaw/download/Regulations,_annotated_05_2014.pdf)).

#### 7.1.1 *Products possibly containing GMO's*

Certificates to confirm that all relevant products are GMO free should be available. Only products listed in Appendix 5B may be used. Also refer to Guideline 7.1.1 in the IPW Manual.

#### 7.1.2 *All other additives*

Only legal additives may be used as indicated in the "*Liquor Products Act 60 of 1989*" (Table 6). Only settling and fining agents are evaluated in this guideline as the use of

these substances may have a negative impact on the environment due to the disposal of used materials.

### **7.1.3 Filtration of wine**

Using filter material impacts negatively on the natural environment either due the impact from mining the bentonite or diatomaceous earth or as a result of the disposal of the used material that contains the filtered organic material that could leach from the filter powders and contaminate the environment. Also refer to Guideline 7.1.3 and Appendix 5B in the IPW Manual.

## **7.2 Storage and record-keeping of chemicals**

### **7.2.1 Chemical stores**

Wine additives and cleaning chemicals should be stored in separate stores that comply with the same basic requirements set out in the *Guidelines for the Responsible Use of Crop Protection and Animal Health Products* from AVCASA. These include good ventilation, storage on pallets (plastic pallets or wooden pallets covered with a plastic layer) and doors with locks.

### **7.2.2 Traceability**

Records as proof of balance between the amount of each product purchased and used should be available. These records should include the batch number of each product. Records should be kept of all additions, including the date, quantity, lot number of the additive, tank and wine batch. Tank movements should also be recorded to enable accurate traceability. The Certificate of Analysis (COA) of each product received by the winery should also be available. Ensure that the Material Safety Data Sheets (MSDS's) of all products used in the winery are kept on file.

## **8 COOLING**

Cooling is evaluated according to the type of refrigerant (e.g. R22) as well as the coolant (e.g. propylene glycol) used. Cooling systems should not contain substances/gasses that are harmful to the atmosphere and environment (refer to Appendix 5C). The maintenance of cooling units are important to ensure that refrigerants do not leak. Refer to GRN no. 37621 of 8 May 2014 (<http://sawic.environment.gov.za/documents/3050.pdf>) for the phase out schedule. From 1 January 2040 no person is allowed to import, place on the market or use HCFC's. A person is prohibited from using HCFC-22 or any refrigerant or refrigerant blend either in pure form or as a component of blended refrigerants, in the construction, assembly or installation of any new refrigeration or air-conditioning or equipment from 1 January 2015. Also refer to <http://www.airafriqueaircon.co.za/page.php?13>.

## **9 WASTEWATER MANAGEMENT**

Wastewater is defined as all water used and generated in the winery during processes like the cleaning of tanks, winery equipment and floors, as well as winemaking processes (e.g. filtration, etc.), bleeding of cooling tower water and possibly laboratory wastewater.

- Compliance with the Department of Water and Sanitation (DWS) General Authorisation should be demonstrated. This department was previously known as the Department of Water Affairs (DWA) and before that as the Department of Water Affairs and Forestry (DWAFF).
- Alternatively, where wineries dispose of its wastewater directly into Municipal sewers for treatment, a formal agreement should be provided as evidence to be able to obtain maximum points for Guidelines 9.1 to 9.4. Where wastewater is

stored in tanks for removal by the Municipality, removal records should confirm that winery wastewater (and not sewerage, or together with sewerage) has indeed been removed. In this case the winery should also be able to confirm that all generated wastewater has been removed (i.e. volume of water used should correspond with volume of wastewater removed).

- Where small wineries dispose less than 1 cubic meter (1 m<sup>3</sup> / 1 kL / 1 000 liter) wastewater into a septic tank and soak-away system on any given day in compliance with the DWS General Authorisation, the maximum points may be obtained for Guidelines 9.2 to 9.4, provided that the soak-away system is not situated in any of the water-controlled areas and must be situated above the 1 in 100 year flood line or riparian habitat whichever is the greatest, or alternatively at least 100 meters from a water resource whichever is the greatest or at least further than a 500 m radius from a borehole that is utilised for drinking water or stock watering, at least 500 m radius from the boundary of a wetland and on land that is not, or does not overlie a major aquifer. The winery should also meet the requirements of Guideline 9.1 (preferably daily water meter readings should be recorded) to confirm that the disposed volume is indeed less than 1 m<sup>3</sup> per day. Monthly quality monitoring should be done.

All other wineries should score points according to the following guidelines:

### **9.1 Monitoring wastewater quantity (see Appendix 5D)**

- According to legislation wineries should monitor the volume of wastewater generated on a weekly basis and keep records for auditing purposes. Where other facilities and/or processes also contribute to the wastewater volume, these volume monitoring records should also be available. It is therefore important to use an effective water meter(s). In most cases it is allowed to install an effective water meter into the incoming line (not on the wastewater line) as the volume of water coming into the winery should be approximately equal to the amount of wastewater that exits the winery. DWS may also require of the winery to monitor the volumes of wastewater that are irrigated.
- It is also important to attempt to separate rain and storm water from wastewater in order to limit the volume of contaminated water. At smaller wineries (generating < 20 ML wastewater per annum) this can ensure that the quantity of wastewater that is contained, qualify to apply for a General Authorisation only, and not for a water license that demands stricter regulations or requirements.

### **9.2 Monitoring wastewater quality (see Appendix 5D)**

Prior to disposal, most wineries store and/or pre-treat their wastewater for re-use/irrigation or to reduce extreme variations in composition. The following procedures should be used for taking representative wastewater samples:

- Sample the wastewater on a monthly basis at the point of disposal/irrigation. DWS usually require that wastewater quality is also monitored on a monthly basis at the point just prior to entry into the irrigation dam.
- Instead of a single **grab** sample, the sample should be composed of equal quantities taken at least 5 sampling points.
- Sample at least 1.5 L wastewater in a glass container and store below 4°C, or as suggested by the laboratory doing the analyses. The sample should be analysed within 48 hours from sampling.
- Avoid sampling at times when the inflows are very low, or when rainwater has a diluting effect.
- Keep record of winery activities at the time when sampling takes place, especially when the total volume at the point of collection is dominated by one or two processes only.

The chemical composition of wastewater gives an indication of the potential environmental and/or social impacts when wastewater is irrigated or disposed in the environment. Juice, wine and lees (sources of organic carbon and inorganic components such as salts, acids and solids) can also enter the wastewater stream and lead to further contamination. Wastewater should be analysed for the following parameters by a SANAS accredited laboratory (the laboratory should be SANAS accredited for each parameter):

- Electrical conductivity (EC)
- pH
- Sodium adsorption ratio (SAR)
- Chemical oxygen demand (COD)
- Potassium (K)
- Faecal coliforms

Should DWS require analyses of additional parameters, these should also be included in the wastewater analysis.

Previously wineries were generally exempted from monthly quality monitoring if wastewater was legally disposed of into a soak-away system (less than 1 m<sup>3</sup> disposed per given day) or legally evaporated. Note that monthly quality monitoring is now also required by the DWS General Authorisation for these wastewater end-uses.

### **9.3 Storing wastewater (see Appendix 5D)**

A scientific study should be compiled to investigate all relevant aspects involving wastewater, soil and crop (if applicable), climate and environment to ensure a sustainable wastewater end-use as well as compliance with legislation. This study will assist the cellar master/winemaker to ensure the following:

- Wastewater must be separated from storm and rain water.
- Pipelines for conducting wastewater must be able to handle the maximum volume at any time and must be made of quality material to prevent leakages.
- Catchment dams for wastewater must be able to handle the maximum volume of wastewater at any one time and enough space should be allowed for possible unexpected volumes of wastewater.
- Catchment dams should be large enough so that sufficient time may lapse for the solids to be deposited and breaking down of organic matter may take place before the water is released or used for irrigation.
- Catchment dams should be of adequate size to ensure that all wastewater generated during rainy spells can be contained. Irrigation may not take place during wet spells to eliminate the risk of potential pollution of the environment. In case of an evaporation dam system, it should also be taken into consideration that the volume evaporated may be less than the sum of the rainfall and the volume of winery wastewater generated.
- Catchment dams should be situated in such a way that there is no contact with storm and rain water. The entire wastewater system (furrows and dams) should be lined to ensure that all wastewater is contained.
- Irrigation systems must be designed in such a way that leakages do not occur. Irrigation should take place by means of moveable overhead irrigation lines to avoid over-irrigation. Note that flood irrigation may be considered a storm water disposal by DWS and is not allowed unless wastewater quality complies with the applicable limit for a river disposal (i.e. Special Limit or General Limit depending of the location of the disposal area).
- Soil samples should be taken from the wastewater irrigated soils on at least an annual basis and compared to a control soil sample. These samples should be analysed by an accredited laboratory to determine whether the wastewater irrigated soils deteriorated due to wastewater irrigation.

If winery wastewater is legally disposed of into a soak-away system and proof can be supplied that less than 1 m<sup>3</sup> is disposed of per given day per title deed, a scientific study would not be compulsory. Note that the soak-away system may not be situated in any of the DWS water-controlled areas and must be situated above the 1 in 100 year flood line or riparian habitat whichever is the greatest, or alternatively at least 100 meters from a water resource whichever is the greatest or at least further than a 500 m radius from a borehole that is utilised for drinking water or stock watering, at least 500 m radius from the boundary of a wetland and on land that is not, or does not overlie a major aquifer.

Wastewater storage in terms of the DWS General Authorisation:

- Wastewater storage for **re-use** (as part of the production process) purposes according to the DWS General Authorisation: If more than 500 m<sup>3</sup> of wastewater is to be stored for re-use purposes on any given day, the water user must register with the Department of Water and Sanitation. Storage of up to a maximum of 5 000 m<sup>3</sup> per property or land **is allowed** in accordance with the DWS General Authorisation.
- Wastewater storage for **disposal** purposes (e.g. beneficial irrigation, evaporation or disposal into a natural water resource) according to the DWS General Authorisation: If more than 1 000 m<sup>3</sup> of wastewater is to be stored for disposal purposes on any given day, the water user must register with the Department of Water and Sanitation. Storage of up to a maximum of 10 000 m<sup>3</sup> per property or up to 50 000 m<sup>3</sup> per wastewater dam system **is allowed** in accordance with the DWS General Authorisation.
- The wastewater storage dams and disposal sites both have to be situated outside a watercourse above the 1 in 100-year flood line or riparian habitat whichever is the greatest, or alternatively at least 100 m from a water resource whichever is the greatest or at least further than a 500 m radius from a borehole that is used for drinking water or stock watering; and should be situated on at least a 500m radius outside the boundary of a wetland; may not be situated on land that is, or overlies, a major aquifer (to be indicated by DWS).
- Any dam (including evaporation systems) with a capacity greater than 50 000 m<sup>3</sup> and with a wall that has a vertical height of more than 5m is declared as a dam with a safety risk. Such a dam requires a licence from DWS and various control measures exist for the erection and maintenance of such a dam. A dam with a capacity greater than 10 000 m<sup>3</sup> must be registered at DWS.
- Should any of the requirements as stipulated by the DWS General Authorisation for wastewater disposal not be complied with (e.g. wastewater quality, wastewater volume, etc.), the winery should apply for a licence with DWS.

#### 9.4 Disposal of wastewater (see Appendix 5D)

- Since untreated wastewater of wineries does not qualify for disposal into natural water resources, wastewater should either be treated or irrigated.
- If on any given day a person wants to irrigate wastewater originating from the production activities in wineries, he/she must register as a water user with the Department of Water and Sanitation (DWS). Up to 500 m<sup>3</sup> of this wastewater may be irrigated per day (e.g. for crop production, including grazing), provided that all wastewater quality parameters comply with the following requirements of the DWS General Authorisation:
  - The electrical conductivity (EC) on any given day is less than 200 milli Siemens per meter (mS/m)
  - The pH is between 6 and 9
  - Sodium adsorption ratio (SAR) is less than 5
  - Chemical oxygen demand (COD) is less than 400 mg/l
  - Faecal coliforms is less than 100 000 cfu/100ml
- The DWS General Authorisation allows the irrigation of up to 50 m<sup>3</sup> wastewater on any given day per title deed should the COD value be higher than 400 mg/l but less than 5 000 mg/l (**licence not required, but compliance with the General**

**Authorisation should be motivated).**

- The registered water user may only irrigate at least 50 m above the 1 in 100 year flood line or riparian habitat whichever is the greatest, or alternatively at least 100 m from a water course whichever is the greatest, or at least further than a 500 m radius from a borehole that is used for drinking water or stock watering; should irrigate on at least a 500m radius outside the boundary of a wetland; and may not irrigate on land that is, or overlies, a major aquifer (to be indicated by DWA).
- Irrigation may not take place during the rainy season.
- The registered user must measure the quantity of wastewater irrigated on a weekly basis and the wastewater quality on a monthly basis at the point just before irrigation. Written records must be kept for inspection by the responsible authority.
- The area of irrigation must be demarcated on a 1: 50 000 topographic map and details provided of the crops under irrigation, irrigation techniques and details of emergency procedures.
- Water logging or damaging of soil, occurrence of flies and mosquitoes, bad odours, secondary pollution, penetration of any surface resources and unauthorised use of water by members of the public must be prevented at all times.
- Solid particles must be removed from the wastewater as soon as possible after contamination (before irrigation) by implementing effective screens and disposed of efficiently and responsibly.
- Storm and rain water originating from the irrigation area must be collected to prevent contamination of clean water.
- Water for cooling and cleaning of tanks and other apparatus must be recycled, purified and re-used as far as possible.
- Water may only be treated with environment friendly chemicals.

The wastewater volume generated by the winery should be registered as a water use at the Department of Water Affairs (DWS) in terms of the Waste Discharge Charge Registration System (WDCS) in accordance with the DWS General Authorisation. Please note that these registration forms do not form part of the application for a General Authorisation (GA) for the end-use (e.g. irrigation) of wastewater. It is two separate processes. Formal application for a General Authorisation would not necessarily be required by DWS; however, the winery should demonstrate compliance with all requirements of the DWS General Authorisation during the audit process. Should any of the requirements as stipulated by the DWS General Authorisation for wastewater disposal not be complied with (e.g. wastewater quality, wastewater volume, etc.), the winery should apply for a licence with DWS.

Where wastewater is legally disposed into a formal soak-away system (French drain) and it can be confirmed that less than 1 m<sup>3</sup> of wastewater is disposed per day, the winery does not have to register their wastewater use with DWS.

Also refer to Appendices 5E, 5F and 5G. **Please note that legislation is amended on a frequent basis and these Appendices can only be used as a tool and the winery is not exempted from any legal requirements based on these Appendices.**

## 10 DISINFECTANTS AND CLEANING AGENTS

The winery and bottling plant must maintain a high standard of housekeeping and only environmentally friendly and food-safe cleaning agents should be used - see Appendix 5H.

## 11 MANAGEMENT OF SOLID WASTE

### 11.1 Disposal and recycling

#### **11.1.1 Disposal of solid waste (including household waste and packaging material) (see Appendices 5I and 5J)**

Packaging material of "dry" stock, excess apparatus and equipment, paint, oils,

lubricants and solvents must be recycled or disposed of in an environment friendly way and in accordance to legislative requirements (also refer to Guideline 11.1.3 that follows).

- Waste bins must be used to collect and sort all waste of the winery (e.g. non-recyclable waste, glass, plastic, paper/carton, metal and used light bulbs).
- Empty cleaning chemical containers and other empty chemical containers should also be done away with in an appropriate manner. Applicable records should be available. If the empty containers are returned to the supplier(s), records of this practice should also be available.
- If solid waste is removed by a service provider, a copy of the applicable disposal permits of the service provider should be obtained. Removal records should be available for auditing purposes.
- If solid waste is removed by the Municipality and/or disposed at the Municipal waste disposal site, the applicable approval should be obtained from the Municipality for the removal and/or disposal of general waste. The necessary removal records and/or invoices should also be available for audit purposes.
- The amount and types of waste removed from the facility for re-use, recycling and disposal should be recorded and summarised on a monthly basis.
- Refer to Appendix 5J for relevant legal requirements. **Please note that legislation is amended on a frequent basis and Appendix 5J can only be used as a tool and the winery is not exempted from any legal requirements based on Appendix 5J.**
- The aim of the wine producer should be to only participate in practices which are legal and environmentally sound.

#### **11.1.2 Grape waste, lees and filter rests**

- Skins, stems, pips and lees must be heaped on an impenetrable layer (such as cement, plastic or suitable clay layer) and covered against rain, to prevent organic acids from seeping out and causing pollution of soil and soil water before having broken down sufficiently to serve as compost. In cases where this waste is disposed on compacted clay soil or on a low risk site, proof must be provided (e.g. soil study, orthophotos, etc.) that all leachate will be contained.
- If no storage space is available, it should rather be used as animal feed or alternatively be supplied to an external company which can process it to compost or re-use it.
- This waste, as well as used sedimentation substances (e.g. bentonite, lees) and filtration material (e.g. diatomaceous earth), must be stored temporarily before being removed to prevent bad odours in the adjacent vicinity.
- Used filtration material, bentonite lees and wine lees should be made available for the recovery of alcohol or tartaric acid where possible to prevent soil and water pollution (which occurs when these substances are exposed to the soil too quickly).
- If used filtration material is not sent for recycling, the waste should be taken to a suitable disposal site to be destroyed as soon as possible, to prevent it from becoming a nuisance (e.g. foul odor). It can also be composted if it can be confirmed that it does not lead to pollution.
- If synthetic tartaric acid is used, a system for the effective disposal thereof must be in place.
- If any of the waste materials are removed by external companies, the necessary documentation should be available during audits as confirmation (e.g. contracts, removal records, letters, etc.). The external companies should dispose/re-use the material in a responsible manner.
- Composting: It is important that cognisance should be taken of your “Duty of care” towards the environment as stipulated by the NEMA. This means that in terms of specifically the composting activities one should ensure that the potential risk of ground and or surface water contamination is avoided. This can be done by ensuring that composting takes place further than 100 m from any water resource on an impenetrable layer (e.g. clay, concrete or plastic), to ensure that the leachate

generated from the compositing activities cannot contaminate groundwater, natural streams or rivers, and is contained and either re-used on the composting site or treated to DWS standards for river disposal. Other nuisance factors related to composting activities such as flies, rodents and odors should be managed so that it does not cause a health risk or nuisance to the neighboring properties. Department of Environmental Affairs published Draft National Norms and Standards for Organic Waste Composting. Refer to the National Environmental Management: Waste Act, 2008 (Act 59 of 2008), Government Gazette No. 37300, 7 February 2014 (Government Notice No. 68).

### **11.1.3 Recycling of solid waste**

- Waste bins must be used to collect and sort all waste of the winery (e.g. non-recyclable waste, glass, plastic, paper/carton, metal and used light bulbs). Empty cleaning chemical containers should also be kept separate for recycling purposes.
- Empty cleaning chemical containers and other chemical containers should be recycled or disposed of in an environmentally and responsible manner. The applicable records must be available. If empty containers are returned to the supplying company, records of this practice should also be available.
- Where possible, material should be re-used (e.g. bottles, cartons and dividers).
- The recycling company that removes/receives the waste, should confirm per letter that waste material from the relevant winery or bottling company is received by the recycling company and that it is responsibly handled and recycled. Records should be kept as confirmation that recycling takes place.
- The amount and types of waste removed from the facility for re-use, recycling and disposal should be recorded and summarised on a monthly basis.

### **11.2 Cleaning of wastewater dams, pipes and other equipment**

- Wastewater dams, pipes and other equipment should be cleaned annually as large volumes of sludge are collected in this way. The winery must develop a formal procedure for cleaning wastewater dams and screens and the procedure should also include where sludge is discarded.
- An attempt should be made to conduct the cleaning operation in the summer months to allow rapid breakdown, thus minimising bad odours.
- Wastewater sludge may only be applied to the soil once the chemical composition thereof has been determined, indicating that it is suitable to be applied to a specific piece of land. If the sludge contains high concentrations of certain elements, it may negatively influence the soil, water sources and plant performance.
- Sludge can also be composted if it can be confirmed that it does not lead to pollution.
- Where sludge is removed by the Municipality, the necessary approval should be obtained from the Municipality and removal records must be available.

## **12 AMBIENT NOISE**

Noise from pumps, compressors, cooling apparatus and vehicles may cause a nuisance or disturbance to neighbours or neighbouring communities. The specific noise limits for different areas, e.g. industrial, urban, suburban or rural, may differ and are also influenced by the time of day when the noise occurs. Noise levels should, therefore, also be determined outside the winery at the point/s where noise can cause problems. For this reason, for example, if the noise level of equipment or vehicles outside the winery exceeds 45 dB, these equipment or vehicles may only be used between 7h00 and 20h00.

**13 PACKAGING MATERIAL (not applicable where only bulk wines are produced)**

- Material must be constituted and treated in such a way that it is safe for humans and environmentally friendly.
- Material must be inert.
- Material should preferably be made of recycled material and should also be recyclable or biodegradable.
- A summary should be available to indicate from which materials and where closures, capsules, labels, bottles, cartons and carton dividers are manufactured. The summary should also indicate whether the product has been made of recycled material and if the product is recyclable or biodegradable.

**14 BOTTLING (not applicable where only bulk wines are produced)**

Procedures to address the following should be in place:

- Bottle breakages on bottling lines must be managed to avoid any contamination and an acceptable bottle breakage clean up procedure should be in place.
- Glass breakages on the bottling line and in all pallets and cartons should be monitored and recorded during bottling. Effective glass removal practices must be implemented to ensure that no glass can be present in the final product. Air or water blasting is not allowed to clean up breakages during bottling.
- Broken glass should be collected and recycled as far as possible.
- Staff working in bottling areas is not allowed to wear any loose jewellery or accessories. Only clean clothes are allowed. No open footwear is allowed and appropriate protective clothing should be worn.
- Lights in areas where wine can be contaminated should be covered with Perspex.

**15 BONUS POINTS: RESPONSIBILITY TOWARDS ENVIRONMENT**

Bonus points may be awarded by the auditor based on environmental responsible initiatives implemented by the winery to reduce its carbon footprint.

**NOTE: The auditor is authorised to award bonus points for additional practices followed by the winery or bottling company based on his/her own discretion and the required evidence. No facility, irrespective of size, is however entitled to these bonus points.**

*Applicable legislation:*

*Health Act, No. 63 of 1977*

*Wet op die Bewaring van Landbouhulpbronne, Nr. 43 van 1983*

*Wet op Drankprodukte, Nr. 60 van 1989*

*Wet op Beroepsgesondheid en -Veiligheid, Nr. 85 van 1993*

*National Water Act, No. 36 of 1998 Revision of General Authorisations in terms of Section 39 of the National Water Act, Government Gazette No.36820, 6 September 2013 (Government Notice No. 665)*

*National Environmental Management Act, 1998 (Act 107 of 1998)*

*National Environmental Management: Waste Act, 2008 (Act 59 of 2008) Draft National Norms and Standards for Organic Waste Composting, Government Gazette No. 37300, 7 February 2014 (Government Notice No. 68).*

*National Environmental Management: Air Quality Act, 2004 (Act 39 of 2004)*

*Regulations regarding the phasing-out and management of ozone-depleting substances, Government Notice No. 37621, 8 May 2014 (Government Notice No. 351)*

*National Environmental Management: Waste Act, 2008 (Act 59 of 2008)*

## F. IPW EVALUATION AND CERTIFICATION: WINERIES AND BOTTLING FACILITIES

### 1. REGISTRATION FOR IPW

Proof of registration is supplied when the annual IPW registration fees are paid.

### 2. IPW CERTIFICATE

An IPW Certificate is issued annually, subject to the following provisions:

- 2.1 An on-line self-evaluation form (available on the website [www.ipw.co.za](http://www.ipw.co.za)) must be completed by the facility by 31 May each year as prescribed. The user name and password for a facility is supplied by the IPW manager.
- 2.2 The self-evaluation form should be completed in reference with the IPW Manual for Wineries and Bottling facilities (9<sup>th</sup> Edition, May 2015).
- 2.3 The qualifying score of 60% or more must be attained.
- 2.4 The following criteria must be complied with:
  - Grapes must be produced according to IPW.
  - No non-permitted residues may be present in the wine.
  - Prescribed record-keeping must be up to date.
  - The winery must have all required written permission/permits/licenses for solid waste and wastewater management.
  - Wine must be produced and bottled by IPW certified facilities.
- 2.5 If any of the criteria stipulated in 2.4 are not complied with, an acceptable action plan describing the steps to be taken to ensure compliance during the following season, must be submitted with the evaluation forms. The IPW certificate does not guarantee that the winery complies with all IPW requirements, but that an acceptable action plan is in place to achieve qualification in the near future.

#### NOTE: Completion of Appendix 4

- Each winery must complete Appendix 4 fully.
- Wineries that only produce bulk wine (i.e. wine is sold before bottling), only complete items marked with W (Points allocated are displayed below Appendix 4).
- Wineries that use a mobile disgorgement and/or bottling facility must complete point 14 in collaboration with the service provider.
- Wineries that use an external disgorgement facility and/or bottler must complete point 13 in collaboration with the external facility/facilities. The external facilities must be IPW certified.
- Bottlers only complete items marked with B. Wineries responsible for their own bottling only need to complete one copy of Appendix 4.

| Evaluation per item according to guidelines             |           | Score | Good<br>5 | Avg<br>3-2 | Poor<br>0 | Total |
|---|-----------|-------|-----------|------------|-----------|-------|
| 1 IPW Training  | W, B      | 5     |           |            |           |       |
| 2 Zoning, registration and analysis of incoming water   | W,B       | 5     |           |            |           |       |
| 3. Quality and temperature of incoming grapes           | W         | 5     |           |            |           |       |
| <b>4. Energy use &amp; Carbon Emissions</b>             |           |       |           |            |           |       |
| 4.1 Carbon Emissions                                    | [X2] W, B | 10    |           |            |           |       |
| 4.2 <b>Bonus points:</b> CO <sub>2</sub> Calculation    | W, B      | (5)   |           |            |           |       |
| 5 Implementing & maintaining Infrastructure & Equipment | [X2] W, B | 10    |           |            |           |       |
| 6 SO <sub>2</sub> -levels (Appendix 5A)                 | [X2] B    | 10    |           |            |           |       |
| <b>7 Substances added to wine (Appendix 5B)</b>         |           |       |           |            |           |       |
| 7.1.1 Products possibly containing GMO's                | W, B      | 5     |           |            |           |       |
| 7.1.2 All other additives                               | W, B      | 5     |           |            |           |       |
| 7.1.3 Filtration of wine                                | W, B      | 5     |           |            |           |       |
| 7.2 Storage and record-keeping of chemicals             |           |       |           |            |           |       |
| 7.2.1 Chemical store                                    | W, B      | 5     |           |            |           |       |
| 7.2.2 Traceability                                      | W, B      | 5     |           |            |           |       |
| 8 Cooling (Appendix 5C)                                 | W, B      | 5     |           |            |           |       |
| <b>9 Management of waste water (Appendix 5D – 5G)</b>   |           |       |           |            |           |       |
| 9.1 Monitoring wastewater quantity                      | [X2] W,B  | 10    |           |            |           |       |
| 9.2 Monitoring wastewater quality                       | [X2] W,B  | 10    |           |            |           |       |
| 9.3 Storing wastewater                                  | [X2] W,B  | 10    |           |            |           |       |
| 9.4 Disposal of wastewater                              | [X2] W,B  | 10    |           |            |           |       |
| 10 Disinfectants & cleaning agents (App. 5H)            | W,B       | 5     |           |            |           |       |

Appendix continues....

| ...Appendix 4 continued  | Score | Good<br>5 | Avg<br>2-3 | Poor<br>0 | Total |
|--|-------|-----------|------------|-----------|-------|
| <b>11 Management of solid waste (Appendix 5I – 5J)</b>           |       |           |            |           |       |
| 11.1.1 Disposal of solid waste W, B                              | 5     |           |            |           |       |
| 11.1.2 Grape waste, lees and filter rests W, B                   | 5     |           |            |           |       |
| 11.1.3 Recycling of solid waste W, B                             | 5     |           |            |           |       |
| 11.2 Cleaning of wastewater dams, pipes and other equipment W, B | 5     |           |            |           |       |
| 12 Ambient noise W, B  | 5     |           |            |           |       |
| 13 Packaging material B  | 5     |           |            |           |       |
| 14 Bottling B  | 5     |           |            |           |       |
| 15 <b>Bonus points</b> (Responsibility towards environment)      | (10)  |           |            |           |       |
| <b>TOTAL</b>   |       |           |            |           |       |

Qualifying score for winery that make wine and bottle (W, B): Total of 93 points or more out of 155

Qualifying score for winery that only make wine (W):

**Total of 81 points or more out of 135**

Qualifying score for bottlers (B):

Total of 90 points or more out of 150

Hereby is confirmed that the evaluation forms were completed and submitted as prescribed, together with any action plans required, if any of the criteria to qualify for an IPW certificate under 2.3 of Section F were not complied with. It is also confirmed that all evaluation forms and action plans from producers have been submitted to the winery.

\_\_\_\_\_  
Name of winery/bottling facility

\_\_\_\_\_  
Telephone number

\_\_\_\_\_  
Responsible person

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Date

\_\_\_\_\_  
SAWIS Producer nr

EVALUATION REGARDING TOTAL S<sub>0</sub><sub>2</sub>-LEVELS (mg/L)

## APPENDIX 5A

| <b>EVALUATION REGARDING TOTAL S<sub>0</sub><sub>2</sub>-LEVELS (mg/L)</b>                  |             |                |             |
|--|-------------|----------------|-------------|
| <b>Wine type</b>   | <b>Good</b> | <b>Average</b> | <b>Poor</b> |
| Natural dry white wine, Rosé, Blanc de Noir and Sparkling wine (< 5g/l residual sugar)     | < 110       | 110 - 140      | >140        |
| Natural dry red wine (< 5g/l residual sugar)   | <100        | 100 - 130      | >130        |
| Natural white and red wine, Rosé, Blanc de Noir and Sparkling wine (> 5g/l residual sugar) | < 120       | 120 - 160      | >160        |
| Fortified wines  | <100        | 100 - 150      | >150        |
| Noble late harvest and wine from naturally dried grapes ("Straw Wine")                     | <200        | 200 - 240      | >240        |

**EVALUATION OF SUBSTANCES ADDED TO WINE BASED ON NEGATIVE ENVIRONMENTAL IMPACT<sup>1</sup>**  
**APPENDIX 5B**

| Least                           | Less                                    | Most               |
|---------------------------------|---|--------------------|
|                                 | <b>Precipitants &amp; fining agents</b> |                    |
| Egg albumen                     | Bentonite (Calcium/Sodium)              |                    |
| Gelatin                         | Activated animal/plant charcoal         |                    |
| Tannin                          | Polyvinyl-polypyrrolidone (PVPP)        |                    |
| Pectolytic enzymes <sup>2</sup> | Silicasol                               |                    |
| Ideal milk                      |   |                    |
| Fish collagen (Isinglass)       |   |                    |
| Milk                            |   |                    |
| Rubigum / Arabic gum            |   |                    |
| Casein                          |   |                    |
|                                 | <b>Filter materials</b>                 |                    |
| Crossflow filtration            | Filter sheets                           | Diatomaceous earth |
| Flotation                       |   |                    |
| Candle filters                  | Cellulose                               | Perlite            |

<sup>1</sup> Only substances which are allowed in terms of table 6 of the "Liquor Products Act 60 of 1989" may be used. Refer to [http://www.sawis.co.za/winelaw/download/Regulations\\_annotated\\_05\\_2014.pdf](http://www.sawis.co.za/winelaw/download/Regulations_annotated_05_2014.pdf)

<sup>2</sup> GMO-free certificate must be on file

## EVALUATION OF COOLING SYSTEMS

## APPENDIX 5C

The most common refrigerants and coolants are indicated below:

| Good                                     | Average   | Poor   |                             |
|--|---|--|-----------------------------|
|  |   | Legal  | Illegal                     |
| Ammonia <sup>1</sup><br>Propylene-glycol | <u>HFC's:</u><br>R134a<br>R143<br><u>Azeotropic blends:</u><br>R407C<br>R410A<br>R507 | <u>Coolant:</u><br>Diethylene-glycol <sup>3</sup><br><u>HCFC's:</u><br>R22 <sup>2</sup> = Freon 22<br>R141b<br>R143a<br><u>Azeotropic blends:</u><br>R404A<br>R409A<br>R412A<br>R502 | <u>CFC's:</u><br>R11<br>R12 |

<sup>1</sup>Highly toxic - must remain in a closed system (not harmful to the atmosphere).

<sup>2</sup>Interim product which will be phased out in time.

<sup>3</sup>Highly toxic and should not be used near food or drink for human consumption.


Refer to Government Notice 351 of 8 May 2014 (<http://sawic.environment.gov.za/documents/3050.pdf>) for the phase out schedule. From 1 January 2040 no person is allowed to import, place on the market or use HCFC's. A person is prohibited from using HCFC-22 or any refrigerant or refrigerant blend either in pure form or as a component of blended refrigerants, in the construction, assembly or installation of any new refrigeration or air-conditioning or equipment from 1 January 2015.

**NOTE:** Other Legal refrigerants or coolants that are not indicated in table 5C may also be used. These refrigerants or coolants will then also be evaluated according to their Ozone Depletion Potential (ODP) and Global Warming Potential (GWP).

**WASTEWATER MANAGEMENT****APPENDIX 5D**

| <b>Action</b>                                      | <b>Good (5)</b>   | <b>Poor (0)</b>  |
|--|---|--|
| <b>Monitoring waste water quantity<sup>1</sup></b> | <ul style="list-style-type: none"> <li>- Effective water meter in use.</li> <li>- Weekly with confirming records.</li> </ul>  | - Poor monitoring or no records.                                 |
| <b>Monitoring waste water quality<sup>2</sup></b>  | <ul style="list-style-type: none"> <li>- Monthly determination of COD, EC, pH, SAR, K and faecal coliforms at accredited laboratory with confirming records.</li> <li>- Representative sampling just before disposal/irrigation.</li> </ul>   | - Longer than monthly or no monitoring.                          |
| <b>Storing of wastewater<sup>3</sup></b>           | <ul style="list-style-type: none"> <li>- Scientific proof as confirmation that containment dam is large enough.</li> <li>- Soil study as proof of suitability of soil and that irrigation area is large enough.</li> <li>- Soil analyses of areas under wastewater irrigation (as well as control)</li> <li>- The necessary registration of wastewater dams if applicable.</li> </ul> | - If any of the requirements under "Good" are not complied with. |
| <b>Disposal of wastewater<sup>4</sup></b>          | <ul style="list-style-type: none"> <li>- Formal agreement with Municipality in place for wastewater removal and/or disposal and compliance</li> <li>- Proven compliance with the DWS General Authorisation.</li> <li>- Registration of wastewater volumes at the DWS</li> </ul>   | - If any of the requirements under "Good" are not complied with. |

- <sup>1</sup> Where monitoring occurred, but not on a weekly basis, the auditor could decide to award points for average score (2 or 3).
- <sup>2</sup> Where monitoring occurred, but not on a monthly basis, the auditor could decide to award points for average score (2 or 3). Quality monitoring is not required if wastewater is legally removed by the Municipality or directly disposed (legally) into Municipal sewer, unless required by the Municipality.
- <sup>3</sup> Where the scientific proof is not available, but according to the auditor highly unlikely that the size of the area and/or the wastewater containment dam is too small, the auditor could decide to award points for average score (2 or 3). A scientific report is not required if wastewater is legally removed by the Municipality or directly disposed (legally) into Municipal sewer, unless required by the Municipality. If the wastewater is removed by the Municipality, the volume of water removed should correspond with the volume of water used in the winery. A scientific report is also not required if less than 1 m<sup>3</sup> of wastewater per day is legally disposed into a soak-away system.
- <sup>4</sup> If it can be confirmed that the winery conforms to all legal requirements of the DWS General Authorisation, the auditor may decide to award 5 points. Where an application has not been submitted but a formal agreement and commitment to address wastewater management has been submitted to the Department of Water and Sanitation, 2 points can be awarded. The same is also applicable for the application of authorisation for the direct disposal of wastewater into the Municipal sewer and/or removal of wastewater by the Municipality.

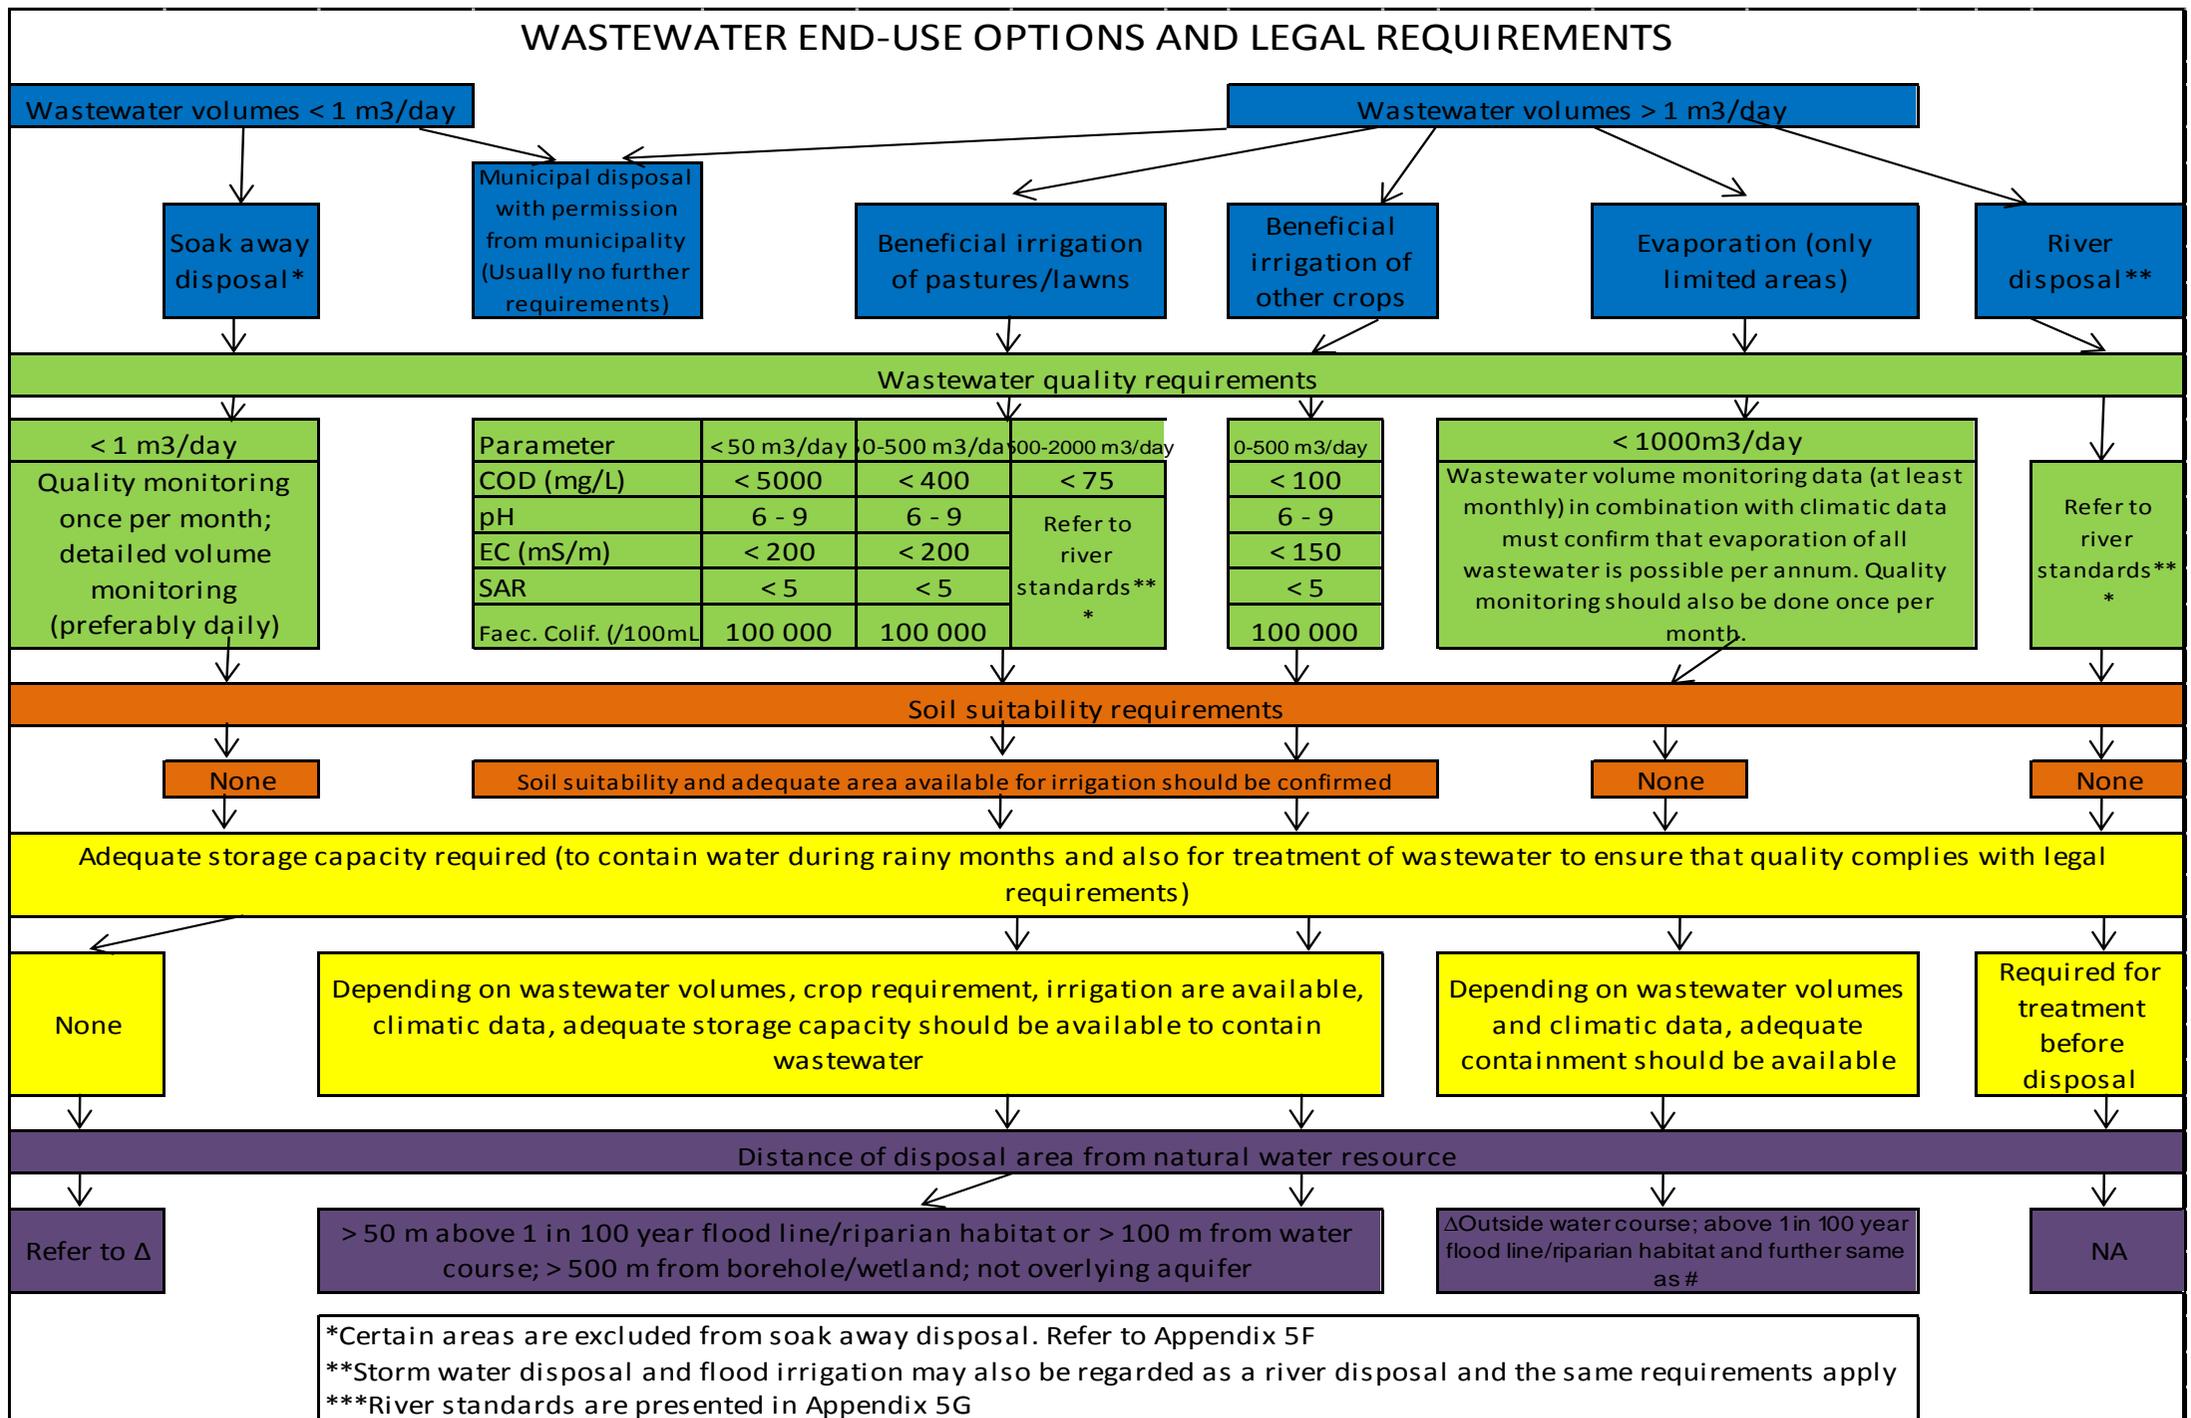

**APPENDIX 5F: Subterranean government water control areas excluded from General Authorisation for disposal of waste**

| Primary drainage region | Tertiary/ Quaternary drainage region | Description of subterranean government water control area | Government Notice No. | Government Gazette Date |
|-------------------------|--------------------------------------|---|-----------------------|-------------------------|
| H                       | H30                                  | Baden   | 136                   | 1967-06-16              |
| A                       | A30                                  | Bo-Molopo   | 1324                  | 1963-08-30              |
| C                       | C30                                  | Bo-Molopo   | 1993                  | 1965-12-17              |
| D                       | D41                                  | Bo-Molopo   | R634                  | 1966-04-29              |
| A                       | A24                                  | Crocodile River Valley                                    | 208                   | 1981-10-23              |
| A                       | A21                                  | Crocodile River Valley                                    | 18                    | 1983-02-18              |
| A                       | A21, A22                             | Kroondal-Marikana   | 180                   | 1963-06-17              |
| G                       | G10,G30                              | Lower Berg River Valley/Saldanha                          | 185                   | 1976-09-10              |
| A,B                     | A60,B50,B31                          | Nyl River Valley  | 56                    | 1971-03-26              |
| G                       | G30                                  | Strandfontein   | 2463                  | 1988-12-09              |
| M                       | M10,M20,M30                          | Uitenhage   | 260                   | 1957-08-23              |
| G                       | G30                                  | Wadrif  | 992                   | 1990-05-11              |
| G                       | G20                                  | Yzerfontein   | 27                    | 1990-02-09              |
| G                       | G30                                  | Graafwater  | 1423                  | 1990-06-29              |
| A                       | A70                                  | Dendron-Vivo  | 813                   | 1994-04-29              |
| A                       | A60                                  | Dorpsrivier   | 312                   | 1990-02-16              |
| C                       | C24                                  | Ventersdorp   | 777                   | 1995-06-02              |

**APPENDIX 5G: Legal standards for river disposal and beneficial irrigation of kikuyu**

| Parameter   | River disposal                                |  | Beneficial irrigation of kikuyu  | Beneficial irrigation of kikuyu (up to 2 000 m <sup>3</sup> /day) |
|---|---|--|--|---|
|   | General limit                                 | Special limit  |  |   |
| Faecal Coliforms (per 100 ml)                       | 1 000   | 0  | 100 000  | 1 000   |
| Chemical Oxygen Demand (mg/l)                       | 75  | 30   | 5 000 (if < 50 m <sup>3</sup> /day is irrigated)<br>400 (if 50 – 500 m <sup>3</sup> /day is irrigated) | 75  |
| pH  | 5.5-9.5                                       | 5.5-7.5  | 6 - 9  | 5.5 – 9.5   |
| Ammonia (ionised and un-ionised) as Nitrogen (mg/l) | 6   | 2  |  | 3   |
| Nitrate/Nitrite as Nitrogen (mg/l)                  | 15  | 1.5  |  | 15  |
| Chlorine as Free Chlorine (mg/l)                    | 0.25  | 0  |  | 0.25  |
| Suspended Solids (mg/l)                             | 25  | 10   |  | 25  |
| Electrical Conductivity (mS/m)                      | 70 mS/m above intake to a maximum of 150 mS/m | 50 mS/m above background receiving water, to a maximum of 100 mS/m | 200  | 70 mS/m above intake to a maximum of 150 mS/m                     |
| Ortho-Phosphate as phosphorous (mg/l)               | 10  | 1 (median) and 2.5 (maximum)                                       |  | 10  |
| Fluoride (mg/l)                                     | 1   | 1  |  | 1   |
| Soap, oil or grease (mg/l)                          | 2.5   | 0  |  | 2.5   |
| Dissolved Arsenic (mg/l)                            | 0.02  | 0.01   |  |   |
| Dissolved Cadmium (mg/l)                            | 0.005   | 0.001  |  |   |
| Dissolved Chromium (VI) (mg/l)                      | 0.05  | 0.02   |  |   |
| Dissolved Copper (mg/l)                             | 0.01  | 0.002  |  |   |
| Dissolved Cyanide (mg/l)                            | 0.02  | 0.01   |  |   |
| Dissolved Iron (mg/l)                               | 0.3   | 0.3  |  |   |
| Dissolved Lead (mg/l)                               | 0.01  | 0.006  |  |   |
| Dissolved Manganese (mg/l)                          | 0.1   | 0.1  |  |   |
| Mercury and its compounds (mg/l)                    | 0.005   | 0.001  |  |   |
| Dissolved Selenium (mg/l)                           | 0.02  | 0.02   |  |   |
| Dissolved Zinc (mg/l)                               | 0.1   | 0.04   |  |   |
| Boron (mg/l)  | 1   | 0.5  |  |   |
| Sodium adsorption ratio (SAR)                       |   |  | < 5  | < 5   |

## EVALUATION OF DISINFECTANTS AND CLEANING AGENTS

## APPENDIX 5H

| Good  | Average  | Poor  |
|---|--|---|
| Anionic and non-ionic                                     |  | Chlorine dioxide (in gas form)                      |
| Iodophores  |  | Sodium hypochlorite                                 |
| Peroxy-acetic acid  |  | Sodium formulated                                   |
| Hydrogen peroxide   |  | Chlorinated alkaline products                       |
| Acid anionic compounds                                    |  | Organic acid formulated products (e.g. citric acid) |
| Calcium- or Potassium hydroxide formulated products       |  | Calcium hypochlorite                                |
| Inorganic acid formulated products (e.g. phosphoric acid) |  | Potassium hypochlorite                              |
| Ozone   |  |   |
| Quaternary ammonium compounds                             | Quaternary ammonium compounds containing chlorides |   |

**NOTE:** Ask the supplier or manufacturer of disinfectants and cleaning agents into which of the above chemical categories the product you obtain from them falls. A particular chemical formulation is often marketed under various brand names. Therefore the Material Safety Data Sheets (MSDS) and Certificates of Analysis/Conformance (COA/COC) indicating the chemical composition must be available for all disinfectants and cleaning agents.


Should sodium hydroxide, chlorine dioxide, sodium hypochlorite, calcium hypochlorite or potassium hypochlorite be used for the treatment of incoming water or wastewater, it will be evaluated under Guideline 9.

## SOLID WASTE MANAGEMENT

## APPENDIX 5I

| Action                              | Good (5)   | Poor (0)   |
|-------------------------------------|--|--|
| <b>Waste management<sup>1</sup></b> | <ul style="list-style-type: none"> <li>- Removal of general waste by waste removal company (invoices and copy of waste disposal permit)</li> <li>- Removal of general waste by Municipality (invoices)</li> <li>- Skins, stems, pips and lees diatomaceous earth, bentonite, spent filter material, sludge from catchment dams etc. must be stored on an impenetrable layer (such as cement, plastic or clay) and covered against rain. Proof of compaction/impenetrable characteristics of site is necessary.</li> <li>- Recovery of alcohol or tartaric acid where possible.</li> <li>- Determination of chemical composition before applied to soil.</li> <li>- Waste sorting and implementation of waste recycling programme (letters from recycling company and recycling records, including summary of each waste type)</li> </ul> | <ul style="list-style-type: none"> <li>- If any of the requirements under "Good" are not complied with, when it was possible.</li> </ul> |

<sup>1</sup> The auditor can decide to award 3 points if stored in/on a low risk area

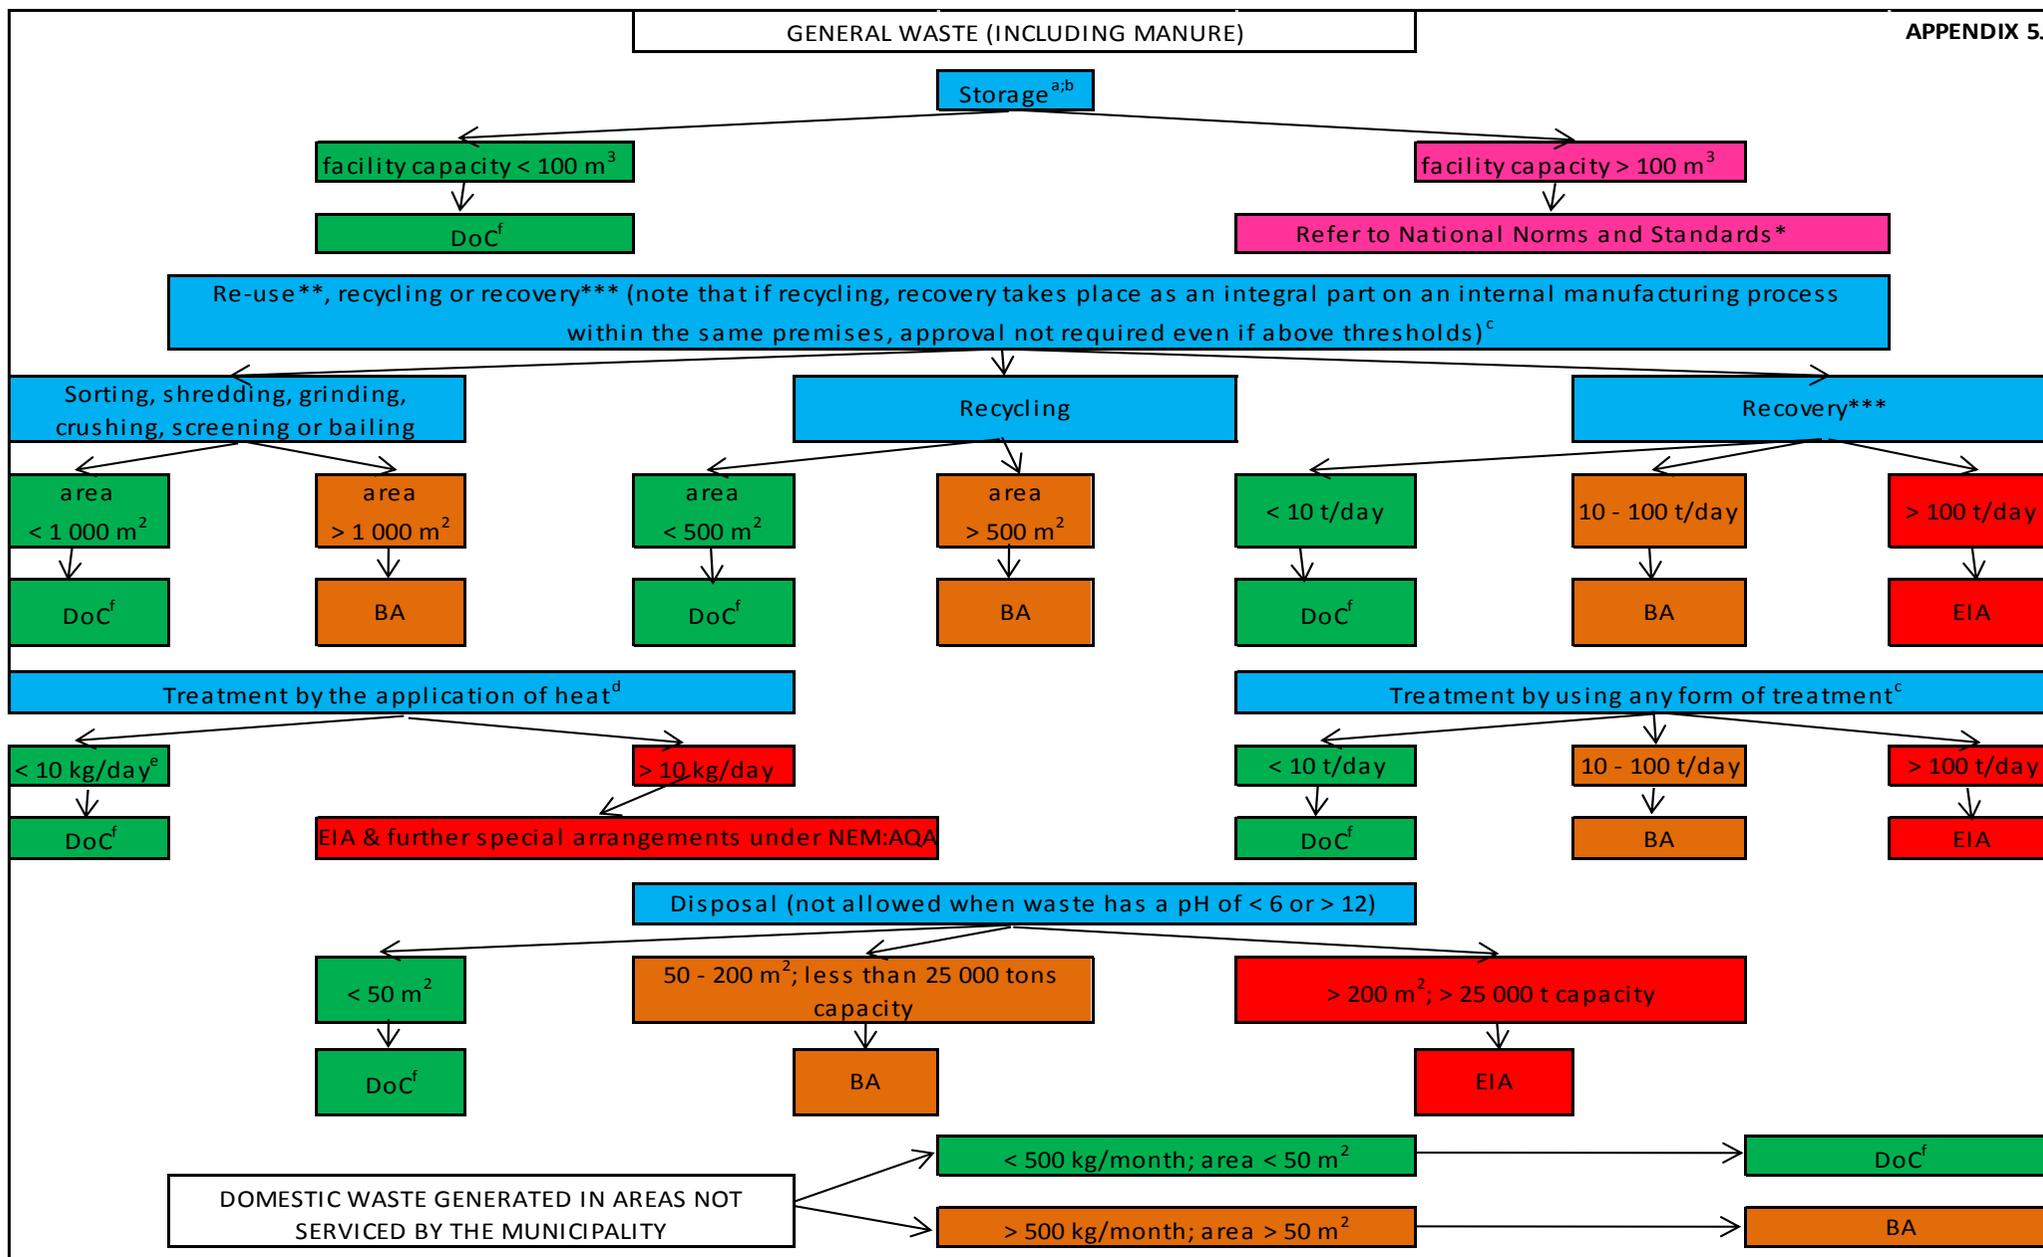

Note that waste legislation is amended frequently and this diagram is only a tool and the wine producer is by no means exempted from any legal requirements based on the diagram

DoC = Duty of Care; BA = Basic Assessment; EIA = Environmental Impact Assessment

Note that persons who lawfully conduct waste management activities listed in the relevant Schedule on the date of the coming into effect of the Notice may continue with those activities until such time that the Minister by notice in the Gazette calls upon those persons to apply for waste management licences

<sup>a</sup>NN&S - National norms and standards for the storage of waste

<sup>b</sup>National Environmental Management: Waste Act, 2008 (Act No. 59 of 2008) - Government Gazette No. 37083, 29 November 2013 (Government Notice No. 926)

<sup>c</sup>National Environmental Management: Waste Act, 2008 (Act No. 59 of 2008) - Government Gazette No. 37083, 29 November 2013, (Government Notice No. 921)

<sup>d</sup>National Environmental Management: Air Quality Act, 2004 (Act No. 39 of 2004) - Government Gazette No. 37054, 22 November 2013, (Government Notice No. 893)

<sup>e</sup>Further special arrangements also apply: e.g. Installation of monitoring equipment and continuous, on-line measurement of particulate matter (PM), O<sub>2</sub>, CO, etc.; Air Quality Improvement Plan

<sup>f</sup>Even if a waste licence is not required, NEMA stipulates that each person as a "Duty of care" towards the environment and each person must ensure that the risk of pollution as a result of the activities be minimised and therefore conform to at least the following:

- # site > 100 m from a water resource and above 1:50 year flood line
- # site adequately fenced, locked and marked with relevant signs to restrict animals and unauthorised entry
- # site should not overlie and area with shallow or emergent water tables
- # waste should not cause any nuisance conditions due to flies or other vermin
- # site located in previously disturbed areas and not in natural vegetation

\*Refer to NN&S for storage of waste

According to the National Environmental Management: Waste Amendment Act, 2014 (Act No. 26 of 2014) - GG No. 37714, 2 June 2014, (Government Notice No. 928):

\*\*Re-use = to utilise the whole, a portion of or a specific part of any substance, material or object from the waste stream for a similar or different purpose without changing the form or properties of such substance, material or object

\*\*\*Recovery = the controlled extraction of a material/object from waste to produce a product

General waste = waste that does not pose an immediate hazard or threat to health or the environment, and includes: domestic waste; building and demolition waste; business waste; inert waste; or any waste classified as non-hazardous waste in terms of the regulations made under section 69

Business waste = waste that emanates from premises that are used wholly or mainly for commercial, retail, wholesale, entertainment or government administration purpose, which include: Wastes from agriculture, horticulture, aquaculture, forestry, hunting and fishing, food preparation and processing

Hazardous waste = any waste that contains organic or inorganic elements or compounds that may have a detrimental impact on health and the environment (includes hazardous waste portion of wastes from agriculture, horticulture, aquaculture, forestry, hunting and fishing

According to definition food preparation and processing waste is not hazardous (however, farm waste e.g. obsolete chemicals and empty agro-chemical containers are considered hazardous waste)

According to the National Environmental Management: Waste Act, 2008 (Act No. 59 of 2008) - Government Gazette No. 36784, 23 August 2013, (Government Notice No. Disposal (not allowed when waste has a pH of < 6 or > 12)

**National Environmental Management: Waste Act, 2008 (Act No 59 of 2008) - National Norms and Standards for the storage of waste****Requirements for waste storage facilities**

1- Registered with the competent authority within 90 days prior to construction and provide at least the following:

- a) demarcation of area where facility will be located
- b) name of facility
- c) name of owner of facility
- d) types of waste
- e) size of facility
- f) sources of waste
- g) time frames for storage
- h) coordinates of facility

2 - When choosing site, consider:

- a) public health and environmental protection
- b) requirements in respect of existing servitudes

3 - Training must be provided continuously and programme must include at least the following:

- a) precautionary measures
- b) procedures that must be applied to a particular type of work
- c) procedures for dealing with spillages and accidents
- d) appropriate use of protective clothing
- e) risks of the hazardous substances to employees' health which they are likely to be exposed to

Sufficient number of employees must be trained to cover for leave periods, etc.

An attendance register must be kept and signed by each employee at each training session

Only trained persons must be allowed to handle hazardous waste

4 - Emergency Preparedness Plan must be in place including the following:

- a) hazard identification
- b) prevention measures
- c) emergency planning
- d) emergency response
- e) remedial actions

Immediate action must be taken to contain spillage and prevent it from entering storm water drains or the environment

5 - Monitoring and inspection must be done

- a) containers, tanks, valves, piping containing hazardous waste must be inspected for leaks, etc. on weekly basis
- b) registered engineer must inspect tanks containing hazardous waste at least once per annum
- c) secondary containment system must be examined once weekly or after each significant precipitation event
- d) ventilation systems, sump pumps, emergency alarms, etc. must be inspected weekly
- e) inspection must include review of adequacy and accessibility of spill response equipment
- f) inspection and remedial action must be taken if environmental pollution is suspected

6 - Internal audits

- a) must be conducted bi-annually
- b) official report must be compiled to report findings (submitted to external auditor)

7 - External audits

- a) must be conducted bi-annually by an independent external auditor
- b) official report must be compiled to report findings (submitted to relevant authority)
- c) audit report must - specifically state whether conditions of these standards are adhered to, etc.

8 - Relevant authority audits and inspections

- a) reserves the right to audit and/or inspect without prior notification
- b) all documentation must be available on request

9 - Reporting

- a) an emergency incident must be reported in accordance with section 30 of NEMA
- b) an action plan must be signed off by senior management
- c) complaints register and incident report must be made available to external auditor and relevant authority
- d) external audit reports must be submitted to the relevant authority within 30 days from the date on which the audit was finalised

10 - Records

- a) the following documents must be available: number of waste storage containers; date of collection; authorised collector(s) and proposed final point of treatment/recycling/disposal
- b) any deviations from the approved integrated or industry waste management plan must be recorded
- c) records must be kept for at least 5 years

11 - Minimum requirements during decommissioning phase

- a) site must be rehabilitated to the satisfaction of the relevant authority and according to the rehabilitation plan
- b) rehabilitation plan, including indication of end-use of the area must be submitted to DEA for approval not more than 1 year prior to intended closure
- c) the plan must indicate the measures for rehabilitation of contaminated areas within the facility and the manner in which waste resulted from decommissioning activities will be managed
- d) the owner of the facility, including the subsequent owner of the facility will remain responsible for any adverse impacts on the environment, even after operations have ceased

12 - For additional info regarding a comparison between requirements for General and Hazardous waste storage facilities, refer to Comparison sheet